

FM100

Fixed Mount Barcode Scanner




Features

◆ Ease of integration.

Compact and easy to integrate design. The small form factor enables easy integration into various solutions. The FM100 has an IP54 rating meaning it is dust -and water resistant.

◆ Advanced technology.

Includes core-technology UIMG, which is independently designed and manufactured by Newland Auto-ID. UIMG technology includes the optical, CMOS, digitizer, decoder, image processing & embedded systems. The scanner supports all global standard 1D symbologies. Its' reading performance reaches and exceeds global standards. By using the accessories provided, the user can ideally set up the scanner to its user environment.

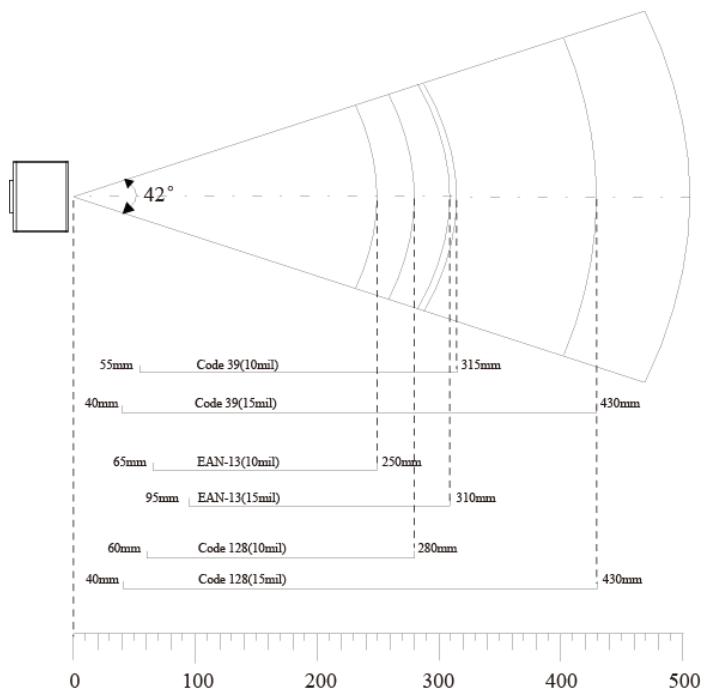

Application Scenarios

Designed for OEM applications, this high performance fixed CCD scan engine can easily be integrated into various solutions such as kiosks, ticketing machines, (Reverse) Vending Machines and many more.

FM100

Fixed Mount Barcode Scanner

Performance	Image Sensor		CCD
	Resolution		2500
	Interface		RS232 / USB 1.1
	Symbologies	1D	Code128, EAN-13, EAN-8, Code39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ISBN/ISSN, Code 93, UCC/EAN-128, GS1Databar,etc.
	Reading Precision		≥ 5mil(Condition: PCS=0.9, testing code: Code 39)
	Sensitivity**	Pitch	±65°@ 0°Roll and 0° Skew
		Roll	±30°@ 0°Pitch and 0° Skew
		Skew	±60°@ 0°Roll and 0° Pitch
	Light Source		LED(622 nm - 628 nm)
	Light Intensity		265 LUX (130 mm)
	Depth of Scan Field		40mm-430mm
	Print Contrast Signal		≥ 30%
Mechanical/ Electrical	Current	Max	250mA
		Working	170mA
		Idle	65mA
	Voltage		DC 5 V
	Power Consumption		1.25W
	Dimensions		49.0(L)*37.0(W)*26.0(H) mm
	Weight		70g
Environmental	Operating Temperature		-5°C~+45°C
	Storage Temperature		-40°C~+60°C
	Humidity		5%~95% (non-condensing)
Certificates	FCC Part15 Class B, CE EMC Class B		
Accessories	USB Cable		This cable connect to the USB Slave port of FM100 with a RJ45 port. With a standard USB Slave port to connect to standard USB Host port
	RS232 Cable		This cable connect to the RS232 port of FM100 with a RJ45 port. With a standard female RS232 port to connect to standard male RS232 port. With a power port to accept power adapter supply.
	Power Adapter		The power adapter for FM100 by the CBL-FM100R. Output: DC 5V, 2A; Input: AC100~240V, 50~60HZ

**Test Condition: Code39: 3 Bytes ; Resolution = 10mil; W:N = 3:1 ; PCS = 0.8 ; Barcode Height = 11mm; Distance = 120mm; T=23°C; Illumination= 200 LUX.

Specifications are subject to change without notice.

Newland EMEA
+31 (0) 345 87 00 33
info@newland-id.com

Newland D-A-CH
+49 (0) 294 298 76758
info@newland-id.de

Newland UK
+44 (0) 1442 212 020
sales@newland-id.co.uk

Newland Nordic & Baltic
+46 (0) 708 847 767
nordic@newland-id.com

Newland Ibérica
+34 (0) 93 303 74 66
info@newland-id.es

Newland France
+31 (0) 345 87 00 33
france@newland-id.com

Newland Middle East
+31 (0) 345 87 00 33
middleeast@newland-id.com

Newland South Africa
+27 (0) 11 553 8010
info@newland-id.co.za

Newland Italy
+39 (0) 342 056 2227
italy@newland-id.com

Newland Russia
+31 (0) 345 87 00 33
russia@newland-id.com